

BYECOLD

BYECOLD®



WARM YOUR LIFE IN MODERN WAYS





INFRARED HEATING PANELS basic

Simple pure lines of the aluminium frame, an excellent performance-price ratio, and long lifetime - these are exactly properties of the BEYCOLD infrared heating panels, basic **A series**.

They can also be placed vertically...

Aluminium feet allow the panels to be placed on the floor vertically. This form of use is optimal if it is necessary to have the panel portable and to move it often to another place.

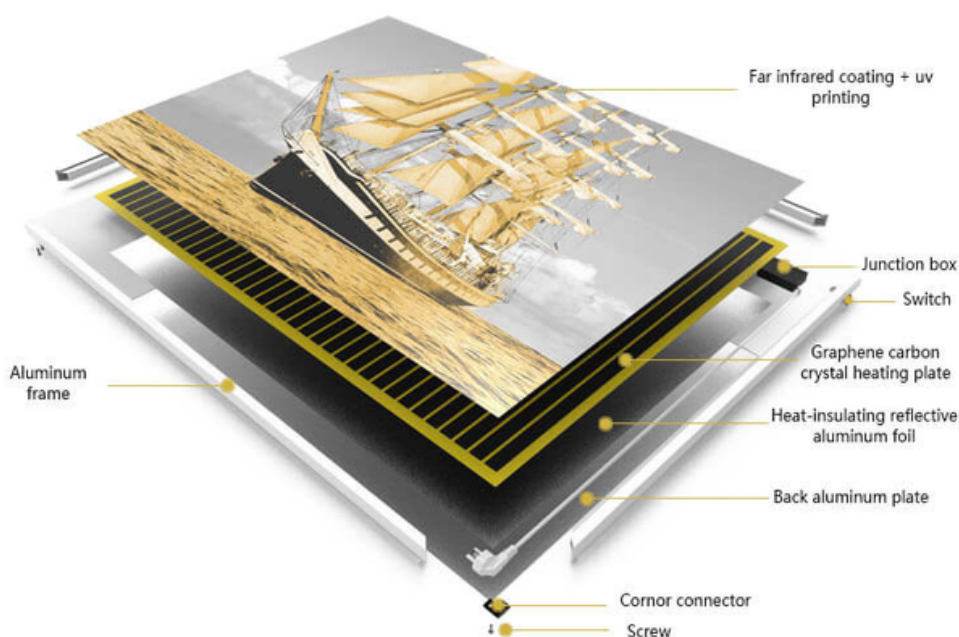

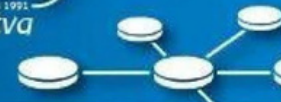

Technical descriptions

Model	A0906P	A1206P
Dimension [mm]	905*605*22 mm	1205*605*22 mm
Nominal performance (wall) [W]	580 W	700 W
Surface temperature [°C]	75-95 °C	75-95 °C
Energy conversion efficiency [%]	98 %	98 %
Frame	white aluminium	white aluminium
Overheating protection	Yes	Yes
Starting length of cable [m]	1,9 m	1,9 m
Certification	CE, RoHS, SAA, TUV GS	CE, RoHS, SAA, TUV GS
Guarantee for heating element	5 years	5 years
Weight [kg]	3,6 kg	4,5 kg
Weight with packaging [kg]	5 kg	6,4 kg



Inpro d.o.o. Novo mesto, Loke 4, 8351 Straža, Slovenija, EU

T: 080 80 89 • info@inpro.pro • www.inpro.pro • www.inpro-trgovina.si