


BYECOLD

BYECOLD®



WARM YOUR LIFE IN MODERN WAYS

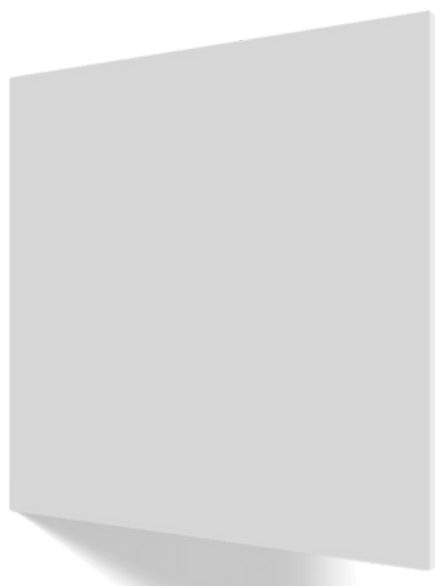

INFRARED HEATING PANELS

ultra thin

Pure minimalistic design, an excellent performance-price ratio, and long lifetime; in a word, these are BYECOLD heating infrared panel of the **HL series**.

When every millimetre matters!

Be sure that due to their minimum thickness, the HL-series infrared panels almost blend in the wall they are mounted on.

Panel thickness only 15mm...

To achieve dimensions and thickness like this meant to make the maximum possible use of the state-of-the-art technologies and knowledge. But the result is worth the efforts! In fact, the photo does not give the right impression - it is necessary to see it in reality!



Installation has never been easier...

Yes, really. Alongside the very unique thickness we have also made the way of installation easier. Now, you need just four wall plugs, and you are finished. It is really not possible to make it easier....

Technical descriptions

Model	HL0706P	HL0906P	HL1206P	HL1207P	HL1209P
Dimension [mm]	720*620*15	920*620*15	1220*620*15	1220*770*15	1220*920*15
Nominal performance (wall) [W]	400	520	700	850	1050
Surface temperature [°C]	80-100	80-100	80-100	80-100	80-100
Energy conversion efficiency [%]	98	98	98	98	98
Frame	white aluminium	white aluminium	white aluminium	white aluminium	white aluminium
Overheating protection	Yes	Yes	Yes	Yes	Yes
Starting length of cable [m]	1,9 m	1,9 m	1,9 m	1,9 m	1,9 m
Certification	CE,RoHS,SAA	CE,RoHS,SAA	CE,RoHS,SAA	CE,RoHS,SAA	CE,RoHS,SAA
Guarantee for heating element	5 years	5 years	5 years	5 years	5 years



Inpro d.o.o. Novo mesto, Loke 4, 8351 Straža, Slovenija, EU

T: 080 80 89 • info@inpro.pro • www.inpro.pro • www.inpro-trgovina.si